



# Aluminum Electrolytic Capacitor – JMN




## ■ FEATURES

- Load life of 5000 hours at 85°C
- Size may be selected
- High ripple current
- Used for computers, communication powers, Hi-ripple circuit of electric vehicle, electric train, general-purpose inverter

## ■ SPECIFICATIONS

Items	Performance Characteristics	
Rated Voltage Range (V)	350V~450V	
Operating Temperature Range (°C)	-40°C~+85°C	
Capacitance Tolerance (25°C, 120Hz)	±20%	
Leakage Current (µA)	0.01CV or 5mA, whichever is smaller. (at 25°C, after 5 minutes) Where, C: Nominal capacitance (µF) V: Rated voltage (V)	
Dissipation Factor (25°C, 120Hz)	0.15	
Load Life (+85°C)	Time	5000hours
	Leakage Current	Not more than the specified value
	Capacitance Change	Within ±20% of the initial value
	Dissipation Factor	Not more than 200% of the specified value.
Shelf Life (+85°C)	Time	500hours
	Leakage Current	Not more than the specified value
	Capacitance Change	Within ±20% of the initial value
	Dissipation Factor	Not more than 200% of the specified value.
After Test: $U_R$ to be applied for 60 minutes, 24 to 48 hours before measurement		

## ■ DIMENSIONS (mm)

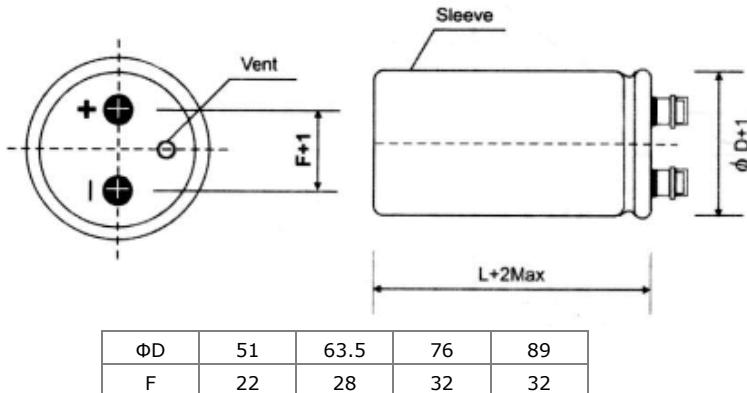

## ■ MULTIPLIER FOR RIPPLE CURRENT

### Frequency coefficient

Frequency(Hz)	50,60	120	300	1K	≥10K
Factor	0.7	1.0	1.10	1.30	1.40

### Temperature coefficient

Temperature(°C)	+40	+60	+85
Factor	1.89	1.67	1.0

## ■ CASE SIZE (mm)

L ΦD	80	100	120	130	160	200	240
51	C8	C10	C12	C13	---	---	---
63.5	D8	D10	D12	D13	D16	D20	---
76	---	E10	E12	E13	E16	E20	---
89	---	---	---	F13	F16	F20	F24

Please visit our website to get more update data, those data & specification are subject to change without notice.



## ■ STANDARD RATINGS

WV (V)	350		400		450	
SV (V) / Cap (uF)	400		450		500	
<b>1000</b>			C8	5.0	C8	5.0
<b>1200</b>	C8	5.5	C8	5.5	C10	6.0
<b>1500</b>	C8	6.1	C10	6.7	C12	7.2
<b>1800</b>	C10	7.4	C10	6.7	C12	7.2
<b>2200</b>	C10	8.2	C13	9.2	D10	9.0
<b>2700</b>	C13	10.2	D10	9.9	D12	10.7
<b>3300</b>	C13	11.3	D12	11.8	D13	12.4
<b>3900</b>	D12	12.8	D13	13.5	D16	14.5
					E12	13.6
<b>4700</b>	D13	14.8	D16	15.9	D20	17.5
			E12	14.9	E13	15.6
<b>5600</b>	D16	17.3	D20	19.1	E16	18.3
	E12	16.3	E13	17.0		
<b>6800</b>	D20	21.1	E16	20.2	F16	21.4
	E13	18.8				
<b>8200</b>	E16	22.1	F16	23.5	F16	23.5
<b>10000</b>	F16	25.9	F16	25.9	F20	28.3
<b>12000</b>	F16	28.4	F20	31.0	F24	33.6
<b>15000</b>	F20	34.6	F24	37.5	Ripple Current (Arms) 85°C 120Hz	
			Case Code			
<b>18000</b>	F24	41.4	Case Code		Ripple Current (Arms) 85°C 120Hz	

Please visit our website to get more update data, those data & specification are subject to change without notice.