

DATA SHEET

Hall Effect Current Sensor



PN: CHB_DS3S6

IPN=06~50A

Feature


- Closed- loop (compensated) current transducer
- Capable measurement of currents: DC, AC,pulse with galvanic isolation between primary circuit and secondary circuit.
- Supply voltage: DC +3.3V
- PCB mounting installation

Advantages

- High accuracy
- Low temperature drift
- Optimized response time, no insertion losses
- Low power consumption

Applications

- The application of variable frequency electrical appliances
- AC/DC variable-speed drive
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Inverter applications

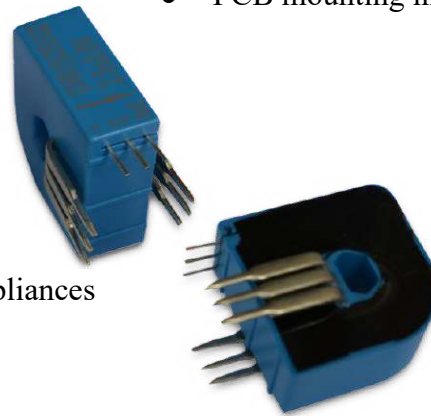

RoHS



Electrical data: (Ta=25°C, Vc=+3.3VDC,RL=2KΩ,CL=10000pF)

Parameter	Ref	CHB06DS3S6	CHB15DS3S6	CH25DS3S6	CHB50DS3S6
Rated input I _{pn} (A)		06	15	25	50
Measuring range I _p (A)		0~±12	0~±30	0~±50	0~±100
Turns ratio N _p /N _s (T)		1:960	1:1200	1:1000	1:2000
Inside resistance R _M (Ω)		100±0.1%	50±0.1%	25±0.1%	25±0.1%
Output voltage V _o (V)		1.650±0.625*(IP/IPN)			
Output voltage V _o (V)	@IP=0,T=25°C	1.650			
Supply voltage V _C (V)		+3.3 ±5%			
Accuracy X _G (%)	@IPN,T=25°C	< ±0.7			
Offset voltage V _{OE} (mV)	@IP=0,T=25°C	< ±20			
Temperature variation of V _{OE} V _{OT} (mV/°C)	@IP=0,-40 ~ +85°C	< ±0.5			
Linearity error ε _r (%FS)		< 0.1			
Di/dt accurately followed (A/μs)		> 50			
Response time τ _{ra} (μs)	@90% of IPN	< 1.0			
Power consumption I _C (mA)		10+I _s			
Bandwidth BW(KHZ)	@-3dB,IPN	DC-200			
Insulation voltage V _d (KV)	@50/60Hz, 1min,AC	4.0			

General data:

Parameter	Value
Operating temperature TA(°C)	-40 ~ +85
Storage temperature TS(°C)	-55~ +125
Mass M(g)	10
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000

Dimensions(mm):

	<p>Connection</p>
	<p>General tolerance</p> <p>General tolerance: <math>\pm 0.2\text{mm}</math> Primary through-hole & size of Primary pin: $4.4 \times 6.6 \pm 0.15\text{mm}$; $0.8 \times 0.9 \pm 0.15\text{mm}$; Secondary pin: 3pin 0.25×0.5;</p>

Primary turns NP(T)	Rated input INP INP(A)				Rated output Voltage(V) VO(V)	Connection of primary pin
	± 6.0	± 15.0	± 25.0	± 50.0		
1	± 6.0	± 15.0	± 25.0	± 50.0	1.65 \pm 0.625	
2	± 3.0	± 7.5	± 12.5	± 25.0	1.65 \pm 0.625	
3	± 2.0	± 5.0	± 8.3	± 16.6	1.65 \pm 0.625	

Remarks:

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole is fully filled with.
- The primary conductor should be <math>< 100^\circ\text{C}</math>.

WARNING : Incorrect wiring may cause damage to the sensor.