


## HV

### Middle-High Voltage Film Capacitor

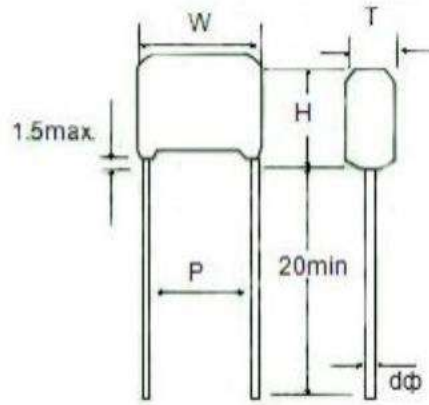

#### SPECIFICATIONS

Rated voltage: 10kVDC,12kVDC,15kVDC

Capacitance range:100-1000pF

Capacitance tolerance:  $\pm 5\%$ ,  $\pm 10\%$

Operating temperature:  $-40^{\circ}\text{C} \sim +100^{\circ}\text{C}$

Dissipation Factor:1kHz $\pm 20\%$

#### FEATURES

1. Another new product available in voltage rating from 10~15kVDC
2. Capacitance from 100~1000pF
3. Optimum choice for double voltage rectification in display.TV receivers and other circuits.

# HV

## Middle-High Voltage Film Capacitor

Allowed Temperature	Rated Voltage(kVDC )	Capacitance(pF)	Dimensions(mm)			
			w	T	H	P
±100℃	10.0	100	10.5	5.0	10.0	8.0
	—	250	13.5	5.0	11.0	10.0
	—	500	14.5	5.5	13.0	10.0
	—	750	15.5	7.0	13.0	12.0
	—	1000	15.5	7.0	15.0	12.0
	12.0	100	13.5	4.5	13.0	10.0
	—	250	14.0	5.5	13.0	10.0
	—	500	15.0	6.0	15.0	11.0
	—	750	14.5	6.0	18.0	10.0
	—	1000	16.0	7.5	18.0	12.0
	15.0	100	13.5	4.5	13.0	10.0
	—	250	14.5	5.5	13.0	10.0
	—	500	16.0	7.0	15.0	12.0
	—	750	16.0	7.0	18.0	12.0
	—	1000	16.8	8.0	18.5	12.0