

Aluminum Electrolytic Capacitor – JSU

■ FEATURES


- For Photo Flash
- High Stability
- Compact and light weight



■ SPECIFICATIONS

Items	Performance Characteristics	
Operating Temperature Range (°C)	-20°C ~ +55°C	
Rated Voltage	330WV.DC	360WV.DC
Voltage Proof	350SV.DC	390SV.DC
Capacitance Tolerance (20°C, 120Hz)	-10%~+20%	
Dissipation Factor (20°C, 120Hz)	Capacitance : 150~600μF : 700~1500μF Less than 0.1 Less than 0.15	
Leakage Current	I=1xC (20°C, after 5 minutes) Max I: Leakage Current (μA) C: Rated Capacitance (μF)	

■ DIMENSIONS (mm)

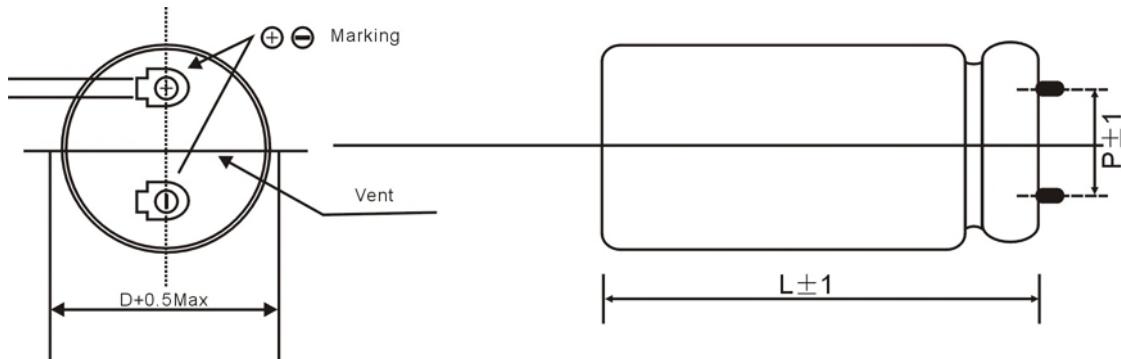

■ STANDARD RATINGS

330WV.DC(350SV.DC)						
Capacitance (μF)	ΦD(mm)	20	22	25	30	35
P		8	10	10	10	10
150		25	--	--	--	--
180		30	25	--	--	--
200		35	30	25	--	--
250		40	30	30	--	--
300		45	35	30	25	--
350		50	40	35	25	--
400		--	45	40	30	25
450		--	50	45	30	25
500		--	--	50	35	25
600		--	--	55	35	30
700		--	--	--	40	30
800		--	--	--	45	35
900		--	--	--	45	35
1000		--	--	--	50	40
1200		--	--	--	60	45
1300		--	--	--	--	55
1500		--	--	--	--	60

360WV.DC(390SV.DC)						
Capacitance (μF)	ΦD(mm)	20	22	25	30	35
P		8	10	10	10	10
150		30	25	--	--	--
180		35	30	25	--	--
200		35	30	30	--	--
250		40	35	30	25	--
300		50	40	35	30	--
350		--	45	40	30	25
400		--	50	45	35	25
450		--	--	50	35	30
500		--	--	60	40	30
600		--	--	--	40	35
700		--	--	--	--	45
800		--	--	--	--	50
900		--	--	--	--	60
1000		--	--	--	--	60
1200		--	--	--	--	50
1300		--	--	--	--	55
1500		--	--	--	--	60

Please visit our website to get more update data, those data & specification are subject to change without notice.