
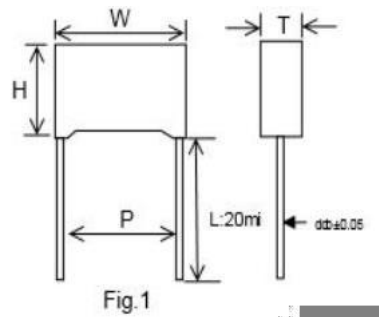


CL21-B { MEB } Metallized Polyester Film Capacitor-Box



CL21-B are non-inductively wound with metallized polyester film as with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin

SPECIFICATIONS

Rated voltage: 100V,160V,250V,400V,630V

Capacitance range:0.010-10.0UF

Capacitance tolerance: $\pm 5\%$ (J) $\pm 10\%$ (k) $\pm 20\%$ (M)

Operating temperature:40/85/21

Voltage proof:1.5UR (5s)


Dissipation Factor: $\leq 1.0\%$ (20°C, 1kHz)

FEATURES

- 1.Box type provides the identical outer appearance
- 2.Wide capacitance range ,small size
- 3.Long life due to self-healing effect
- 4.Suitable for blocking,by-pass and coupling of DC and signals to VHF range
- 5.Widely used in filter,noise suppression and low pulse circuits

CL21-B{ MEB }

Metallized Polyester Film Capacitor-Box

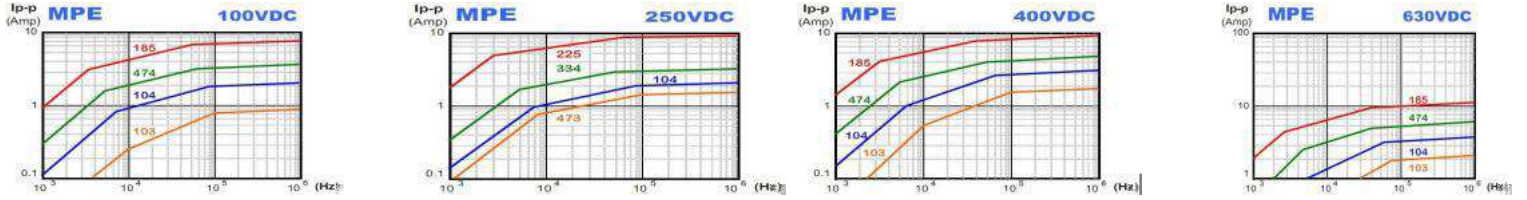

Part Number	Rated Cap.	100V DC					Part Number	Rated Cap.	250V DC					Part Number	Rated Cap.	400V DC				
		W	H	T	P	d			W	H	T	P	d			W	H	T	P	d
		±0.5	±0.5	±0.5	±1.0	±0.05			±0.5	±0.5	±0.5	±1.0	±0.05			±0.5	±0.5	±0.5	±1.0	±0.05
STCL21-B103 2AL7P	0.01uF	10.0	9.0	4.0	7.5	0.6	STCL21-B103 2EL7P	0.01uF	10.0	9.0	4.0	7.5	0.6	STCL21-B103 2GL7P	0.01uF	10.0	9.0	4.0	7.5	0.6
STCL21-B153 2AL7P	0.015uF	10.0	9.0	4.0	7.5	0.6	STCL21-B153 2EL7P	0.015uF	10.0	9.0	4.0	7.5	0.6	STCL21-B103 2GL10	0.01uF	13.0	9.0	4.0	10.0	0.6
STCL21-B223 2AL7P	0.022uF	10.0	9.0	4.0	7.5	0.6	STCL21-B223 2EL7P	0.022uF	10.0	9.0	4.0	7.5	0.6	STCL21-B153 2GL7P	0.015uF	10.0	9.0	4.0	7.5	0.6
STCL21-B273 2AL7P	0.027uF	10.0	9.0	4.0	7.5	0.6	STCL21-B273 2EL7P	0.027uF	10.0	9.0	4.0	7.5	0.6	STCL21-B153 2GL10	0.015uF	13.0	9.0	4.0	10.0	0.6
STCL21-B333 2AL7P	0.033uF	10.0	9.0	4.0	7.5	0.6	STCL21-B333 2EL7P	0.033uF	10.0	9.0	4.0	7.5	0.6	STCL21-B223 2GL7P	0.022uF	10.0	9.0	4.0	7.5	0.6
STCL21-B473 2AL7P	0.047uF	10.0	9.0	4.0	7.5	0.6	STCL21-B473 2EL7P	0.047uF	10.0	9.0	4.0	7.5	0.6	STCL21-B223 2GL10	0.022uF	13.0	9.0	4.0	10.0	0.6
STCL21-B563 2AL7P	0.056uF	10.0	9.0	4.0	7.5	0.6	STCL21-B683 2EL7P	0.068uF	10.0	9.0	4.0	7.5	0.6	STCL21-B333 2GL7P	0.033uF	10.0	9.0	4.0	7.5	0.6
STCL21-B683 2AL7P	0.068uF	10.0	9.0	4.0	7.5	0.6	STCL21-B683 2EL10	0.068uF	13.0	9.0	4.0	10.0	0.6	STCL21-B333 2GL10	0.033uF	13.0	11.0	5.0	10.0	0.6
STCL21-B823 2AL7P	0.082uF	10.0	9.0	4.0	7.5	0.6	STCL21-B104 2EL7P	0.10uF	10.0	9.0	4.0	7.5	0.6	STCL21-B473 2GL7P	0.047uF	10.0	9.0	4.0	7.5	0.6
STCL21-B104 2AL10	0.1uF	13.0	9.0	4.0	10.0	0.6	STCL21-B104 2EL10	0.10uF	13.0	9.0	4.0	10.0	0.6	STCL21-B473 2GL10	0.047uF	13.0	11.0	5.0	10.0	0.6
STCL21-B154 2AL10	0.15uF	13.0	9.0	4.0	10.0	0.6	STCL21-B154 2EL7P	0.15uF	10.0	11.0	5.0	7.5	0.6	STCL21-B563 2GL7P	0.056uF	10.0	11.0	5.0	7.5	0.6
STCL21-B184 2AL10	0.18uF	13.0	11.0	5.0	10.0	0.6	STCL21-B154 2EL10	0.15uF	13.0	11.0	5.0	10.0	0.6	STCL21-B563 2GL10	0.056uF	13.0	12.0	6.0	10.0	0.6
STCL21-B224 2AL10	0.22uF	13.0	11.0	5.0	10.0	0.6	STCL21-B154 2EL15	0.15uF	18.0	11.0	5.0	15.0	0.6	STCL21-B683 2GL7P	0.068uF	10.0	11.0	5.0	7.5	0.6
STCL21-B274 2AL10	0.27uF	13.0	11.0	5.0	10.0	0.6	STCL21-B224 2EL7P	0.22uF	10.0	11.0	5.0	7.5	0.6	STCL21-B683 2GL10	0.068uF	13.0	12.0	6.0	10.0	0.6
STCL21-B334 2AL10	0.33uF	13.0	11.0	5.0	10.0	0.6	STCL21-B224 2EL10	0.22uF	13.0	12.0	6.0	10.0	0.6	STCL21-B683 2GL15	0.068uF	18.0	11.0	5.0	15.0	0.6
STCL21-B474 2AL15	0.47uF	18.0	11.0	5.0	15.0	0.6	STCL21-B224 2EL15	0.22uF	18.0	11.0	5.0	15.0	0.6	STCL21-B104 2GL7P	0.10uF	10.0	12.0	6.0	7.5	0.6
STCL21-B564 2AL15	0.56uF	18.0	11.0	5.0	15.0	0.6	STCL21-B334 2EL7P	0.33uF	10.0	12.0	6.0	7.5	0.6	STCL21-B104 2GL10	0.10uF	13.0	12.0	6.0	10.0	0.6
STCL21-B684 2AL15	0.68uF	18.0	12.0	6.0	15.0	0.8	STCL21-B334 2EL10	0.33uF	13.0	12.0	6.0	10.0	0.6	STCL21-B104 2GL15	0.10uF	18.0	11.0	5.0	15.0	0.6
STCL21-B824 2AL15	0.82uF	18.0	13.5	7.5	15.0	0.8	STCL21-B334 2EL15	0.33uF	18.0	11.0	5.0	15.0	0.6	STCL21-B154 2GL7P	0.15uF	10.0	12.0	6.0	7.5	0.6
STCL21-B105 2AL15	1.0uF	18.0	13.5	7.5	15.0	0.8	STCL21-B474 2EL15	0.47uF	18.0	12.0	6.0	15.0	0.8	STCL21-B154 2GL10	0.15uF	13.0	13.0	7.0	10.0	0.6
STCL21-B125 2AL15	1.2uF	18.0	13.5	7.5	15.0	0.8	STCL21-B474 2EL22	0.47uF	26.5	15.0	6.0	22.5	0.8	STCL21-B154 2GL15	0.15uF	18.0	11.0	5.0	15.0	0.6
STCL21-B155 2AL15	1.5uF	18.0	13.5	7.5	15.0	0.8	STCL21-B684 2EL15	0.68uF	18.0	14.5	8.5	15.0	0.8	STCL21-B224 2GL15	0.22uF	18.0	12.0	6.0	15.0	0.8
STCL21-B185 2AL15	1.8uF	18.0	14.5	8.5	15.0	0.8	STCL21-B684 2EL22	0.68uF	26.5	15.0	6.0	22.5	0.8	STCL21-B224 2GL22	0.22uF	26.5	15.0	6.0	22.5	0.8
STCL21-B225 2AL22	2.2uF	26.5	16.5	7.0	22.5	0.8	STCL21-B105 2EL15	1.0uF	18.0	16.0	10.0	15.0	0.8	STCL21-B334 2GL15	0.33uF	18.0	13.5	7.5	15.0	0.8
STCL21-B275 2AL22	2.7uF	26.5	17.0	8.5	22.5	0.8	STCL21-B105 2EL22	1.0uF	26.5	16.5	7.0	22.5	0.8	STCL21-B334 2GL22	0.33uF	26.5	16.5	7.0	22.5	0.8
STCL21-B335 2AL22	3.3uF	26.5	19.0	10.0	22.5	0.8	STCL21-B155 2EL27	1.5uF	31.5	19.5	11.0	27.5	0.8	STCL21-B474 2GL15	0.47uF	18.0	14.5	8.5	15.0	0.8
STCL21-B475 2AL22	4.7uF	26.5	20.0	11.0	22.5	0.8	STCL21-B225 2EL27	2.2uF	31.5	19.5	11.0	27.5	0.8	STCL21-B474 2GL22	0.47uF	26.5	17.0	8.5	22.5	0.8
STCL21-B685 2AL27	6.8uF	31.5	21.0	12.0	27.5	0.8	STCL21-B335 2EL27	3.3uF	32.0	20.0	11.0	27.5	0.8	STCL21-B684 2GL22	0.68uF	26.5	20.0	10.0	22.5	0.8
STCL21-B106 2AL27	10.0uF	31.5	24.5	15.0	27.5	0.8	STCL21-B475 2EL27	4.7uF	32.0	24.5	15.0	27.5	0.8	STCL21-B105 2GL27	1.0uF	31.5	19.5	11.0	27.5	0.8
Part Number	Rated Cap.	630V DC					Part Number	Rated Cap.	630V DC					Part Number	Rated Cap.	630V DC				
		W	H	T	P	d			W	H	T	P	d			W	H	T	P	d
		±0.5	±0.5	±0.5	±1.0	±0.05			±0.5	±0.5	±0.5	±1.0	±0.05			±0.5	±0.5	±0.5	±1.0	±0.05
STCL21-B472 2JL10	4700pF	13.0	9.0	4.0	10.0	0.6	STCL21-B473 2JL15	0.047uF	18.0	11.0	5.0	15.0	0.6	STCL21-B274 2JL15	0.27uF	18.0	16.0	10.0	15.0	0.8
STCL21-B562 2JL10	5600pF	13.0	9.0	4.0	10.0	0.6	STCL21-B563 2JL15	0.056uF	18.0	12.0	6.0	15.0	0.8	STCL21-B274 2JL22	0.27uF	26.5	17.0	8.5	22.5	22.5
STCL21-B682 2JL10	6800pF	13.0	9.0	4.0	10.0	0.6	STCL21-B683 2JL15	0.068uF	18.0	12.0	6.0	15.0	0.8	STCL21-B334 2JL15	0.33uF	18.0	18.5	11.0	15.0	0.8
STCL21-B822 2JL10	8200pF	13.0	9.0	4.0	10.0	0.6	STCL21-B104 2JL15	0.10uF	18.0	13.5	7.5	15.0	0.8	STCL21-B334 2JL22	0.33uF	26.5	19.0	10.0	22.5	0.8
STCL21-B103 2JL10	0.01uF	13.0	9.0	4.0	10.0	0.6	STCL21-B124 2JL15	0.12uF	18.0	13.5	7.5	15.0	0.8	STCL21-B474 2JL15	0.47uF	18.0	19.0	11.0	15.0	0.8
STCL21-B153 2JL10	0.015uF	13.0	11.0	5.0	10.0	0.6	STCL21-B154 2JL15	0.15uF	18.0	14.5	8.5	15.0	0.8	STCL21-B474 2JL22	0.47uF	26.5	20.0	11.5	22.5	0.8
STCL21-B223 2JL10	0.022uF	13.0	11.0	5.0	10.0	0.6	STCL21-B154 2JL22	0.15uF	26.5	15.0	6.0	22.5	0.8	STCL21-B564 2JL27	0.56uF	31.5	19.5	11.0	27.5	0.8
STCL21-B273 2JL10	0.027uF	13.0	12.0	6.0	10.0	0.6	STCL21-B224 2JL15	0.22uF	18.0	14.5	8.5	15.0	0.8	STCL21-B684 2JL27	0.68uF	32.0	22.0	13.0	27.5	0.8
STCL21-B333 2JL10	0.033uF	13.0	13.0	7.0	10.0	0.6	STCL21-B224 2JL22	0.22uF	26.5	16.5	7.0	22.5	0.8	STCL21-B824 2JL27	0.82uF	32.0	25.0	14.0	27.5	0.8

Unit:mm